
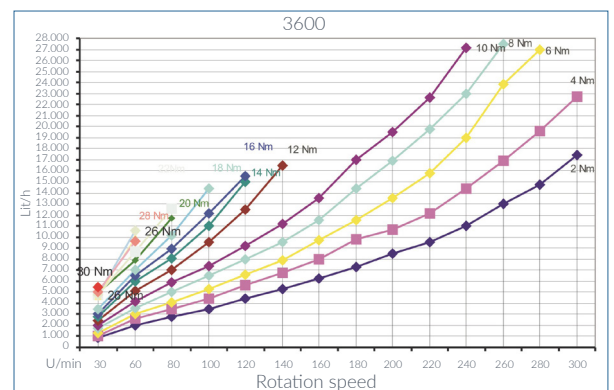
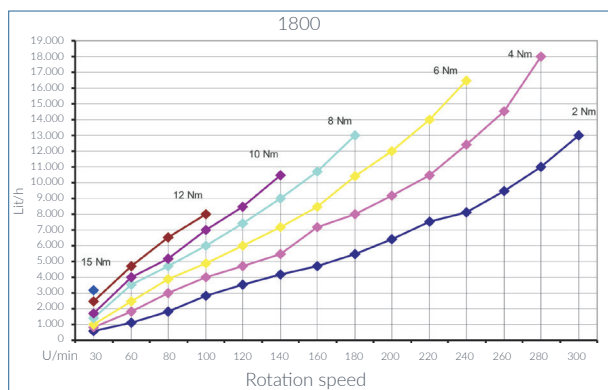
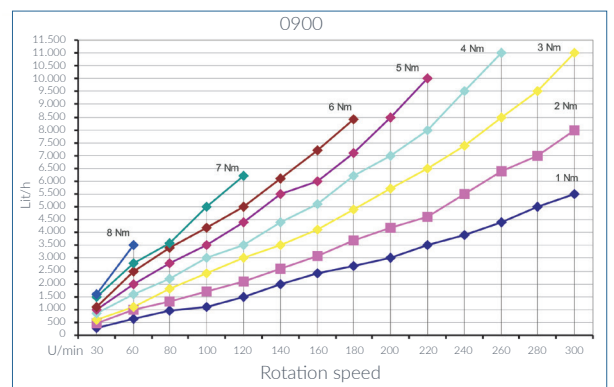




Performance data & transmissions

PERFORMANCE DATA

ROTATION SPEED – PERFORMANCE - AIR CONSUMPTION

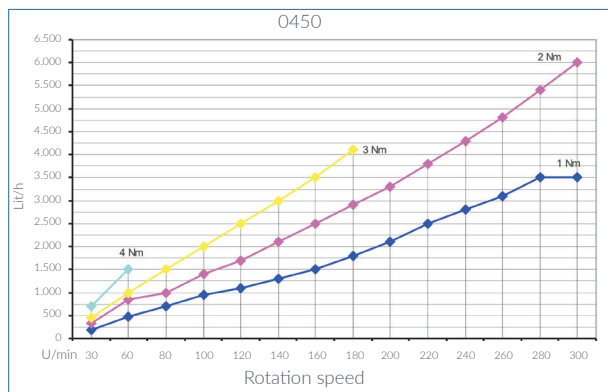

TORQUE - PERFORMANCE

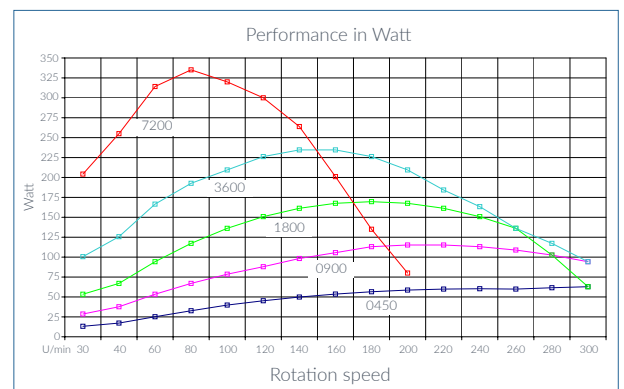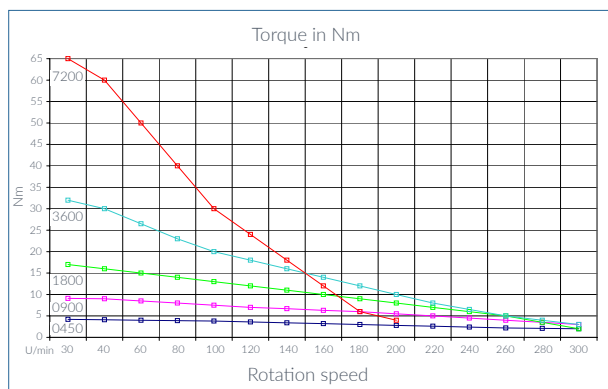

WE GENERATE MOVEMENT IN SPECIAL ENVIRONMENTS.

TRANSMISSIONS

(For motor data please refer to the data sheet of the respective motor)



Motor	0450			0900			1800			3600		
Art. No.	5039	5040	5041	5039	5040	5041	5042	5043	5044	5042	5043	5044
Transmission	3:1	9:1	1:2	3:1	9:1	1:2	3:1	9:1	1:2	3:1	9:1	1:2
L1 [mm]	120	146	120	134.5	160.5	134.5	161	192.5	161	183	214.5	183
L2 [mm]	94	120	94	108.5	134.5	108.5	120	151.5	120	142	173.5	142
L3 [mm]	92.5	118.5	92.5	107	133	107	117.5	149	117.5	139.5	171	139.5
Max. rotation speed [1/min]	100	33	600	100	33	600	100	33	600	100	33	600
Starting torque [Nm]	12	36	2	24	72	4	48	144	8	96	288	16
Weight kg (motor with transmission)	2	2.8	2.1	2.1	3	2.3	5.7	7.9	5.9	7.5	8.5	6.5

TRANSMISSION STAINLESS STEEL MOTOR

Motor	0450 INOX			0900 INOX			1800 INOX			3600 INOX		
Art. No.	5045	5046	5047	5045	5046	5047	5048	5049	5050	5048	5049	5050
Transmission	3:1	9:1	1:2	3:1	9:1	1:2	3:1	9:1	1:2	3:1	9:1	1:2

WE GENERATE MOVEMENT IN SPECIAL ENVIRONMENTS.