Drive and stirring technology for

PHARMA | FOOD | COSMETICS | CHEMICALS | AUTOMATION

Drum agitator for 2“ tight-head drum

Stirrer drive:
eco-Drive
ATEX certification
Ex II 2 G Ex h IIC T5 Gb X
Ex II 2 D Ex h IIIC T100°C Db X

Flexible traverse with range from
378mm/14.88in to 613mm/24.13in

Agitator shaft
V4A Edelstahl 1.4404

Pitch blade turbine
V4A stainless steel 1.4404
(glass bead blasted)

PITCH BLADE TURBINE
folded

for 2“ tight-head drum openings

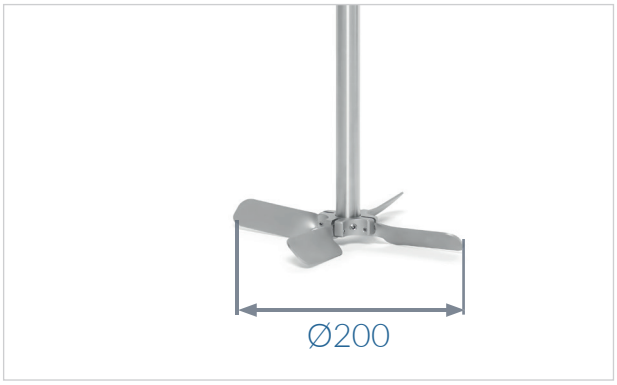

PITCH BLADE TURBINE
unfolded

WE GENERATE MOVEMENT IN SPECIAL ENVIRONMENTS.

Recommended combinations

Individual dimensions possible.
Dimensions in mm/in.

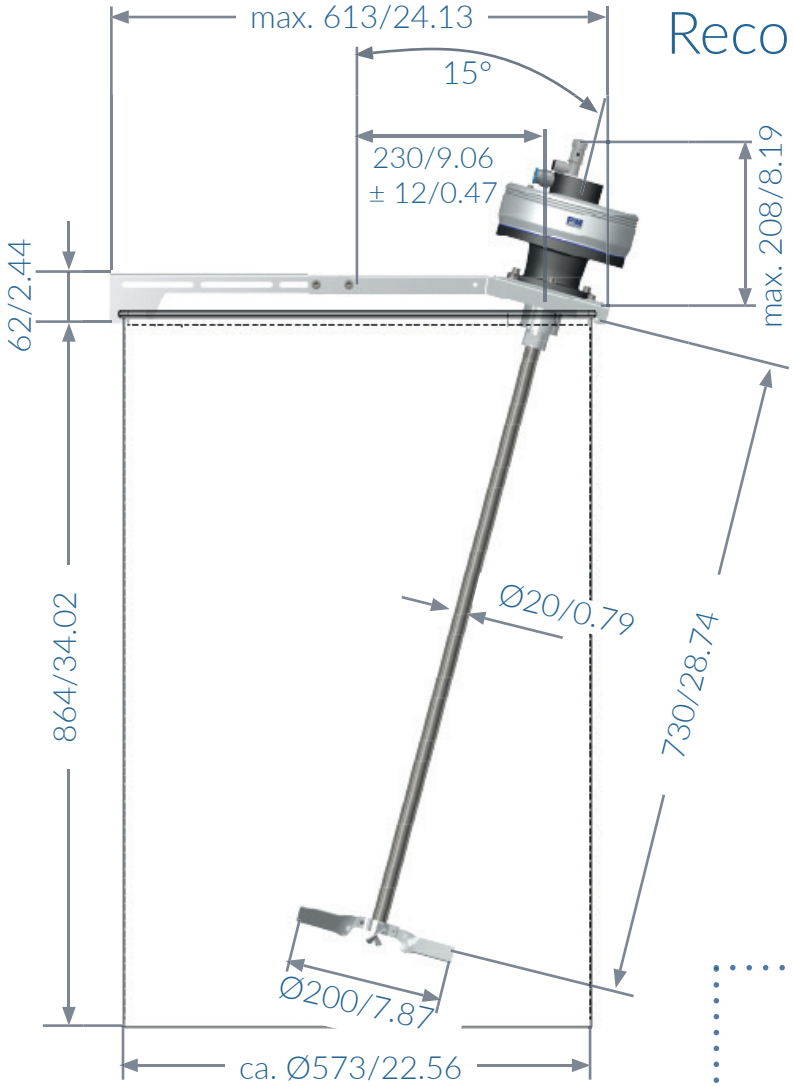

Agitator for 200l tight-head drum

Art. no.:
eco-Drive 1800 V2: 6003
Agitator shaft 730/28.74: 5097
Pitch blade turbine Ø200/7.87: 5215
Flexible traverse: 5089

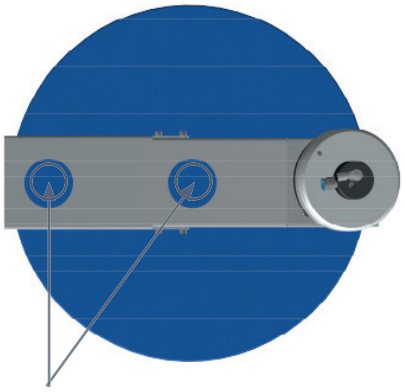

Bunghole

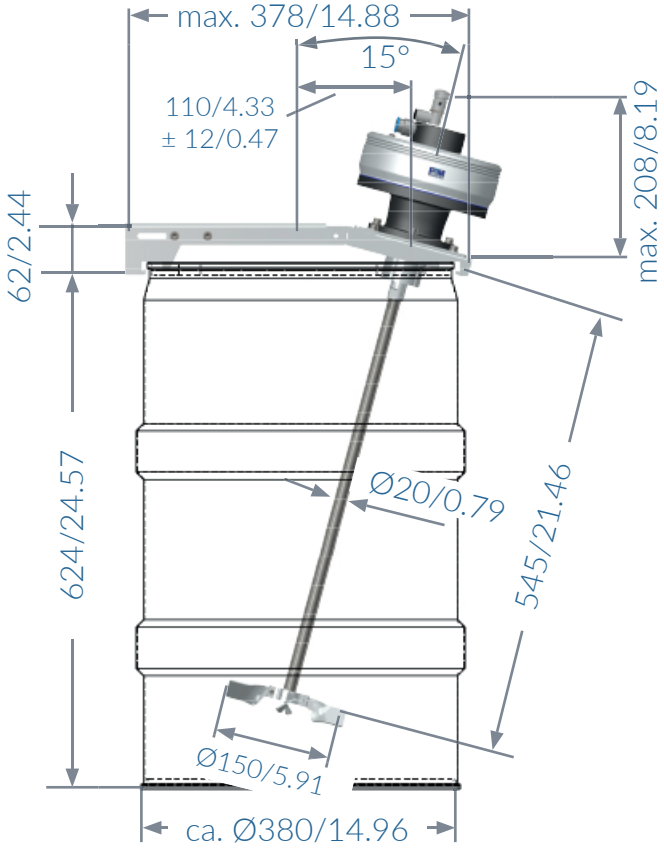

Agitator for 60l tight-head drum

Art. no.:
eco-Drive 900 V2: 6003
Agitator shaft 545/21.46: 5109
Pitch blade turbine Ø150/5.91: 5251
Flexible Traverse: 5089

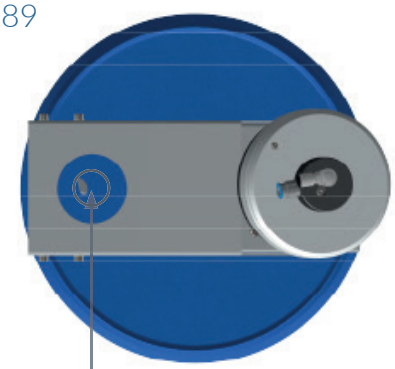

Bunghole

WE GENERATE MOVEMENT IN SPECIAL ENVIRONMENTS.